



BUILDING PERMIT

CITY OF SIERRA MADRE

232 W. Sierra Madre Blvd, Sierra Madre, CA 91024, (626) 355-7135

Permit No:	B-BLD-260043	Date Issued:	2/4/2026
Job Address:	700 N Sunnyside Ave	A.P.N.	5761002009
Subdivision:		Lot Number:	
Owner:	TOLL WEST COAST LLC	Contractor:	MAELY INC
Address:	9301 CORBIN AVE, SUITE 1200 NORTHRIDGE, CA 91324	Address:	9301 CORBIN AVE, SUITE 1200 NORTHRIDGE, CA 91324
Issued To:	ANDREW DUTTON	License #:	890900
Address:	9301 CORBIN AVE, SUITE 1200 NORTHRIDGE, CA 91324	City Business License #:	BL01197L
Project Description:	Temporary chain link style construction fence with acoustic blanket material along entire West and South property limits.		
Valuation:	\$75,000.00		

NOTES: A building permit is required for the construction of a new lightweight material fence of any height; minimum permit fee applies.

FEE CODE	DESCRIPTION	QTY	AMOUNT
BP004 OR	Permit Fee Valuation to \$100,000	243	\$243.00
		TOTAL	\$243.00

NOTICE

ALL FEES ARE NON-REFUNDABLE.

THIS PERMIT IS VALID FOR 365 DAYS FROM THE DATE IT IS ISSUED. IF A MEANINGFUL* INSPECTION IS NOT CONDUCTED FOR WORK AUTHORIZED BY THIS PERMIT WITHIN THE 365-DAY PERIOD, THE PERMIT WILL BE CONSIDERED INVALID. EVERY MEANINGFUL INSPECTION RENEWS A 180-DAY TIMEFRAME FROM THE DATE OF THE INSPECTION.

FOR PROJECTS WHERE A CONSTRUCTION PLAN WAS APPROVED AS A REQUIREMENT OF THE BUILDING PERMIT APPROVAL, A COMPLETE AND LEGIBLE COPY OF THE CONSTRUCTION PLANS AS APPROVED BY THE CITY SHALL BE AVAILABLE FOR OBSERVATION BY THE INSPECTOR DURING A SCHEDULED INSPECTION.

I ACKNOWLEDGE THAT I HAVE READ AND UNDERSTAND THE INSTRUCTIONS ACCOMPANYING THIS APPLICATION, AND THAT ALL STATEMENTS MADE HEREIN ARE TRUE, COMPLETE, AND CORRECT, WITH NO MATERIAL INFORMATION OMITTED. I CERTIFY THAT I AM PROPERLY REGISTERED AND/OR LICENSED AS REQUIRED BY THE CITY OF SIERRA MADRE AND THE STATE OF CALIFORNIA, OR THAT I AM THE LEGAL OWNER OF THE ABOVE-DESCRIBED RESIDENTIAL PROPERTY. I UNDERSTAND THAT NO PERSON SHALL BE EMPLOYED IN VIOLATION OF THE CALIFORNIA LABOR CODE, AND THAT A VALID CERTIFICATE OF INSURANCE IS REQUIRED AND WILL BE PROVIDED AS PART OF THIS APPLICATION.

THE APPLICATION HAS BEEN ELECTRONICALLY SIGNED AND SUBMITTAL OF THIS APPLICATION, AND I ACKNOWLEDGE THAT I HAVE REVIEWED ITS CONTENTS AND WILL COMPLY WITH ALL APPLICABLE LAWS AND REGULATIONS OF THE CITY OF SIERRA MADRE AND THE STATE OF CALIFORNIA GOVERNING BUILDING AND CONSTRUCTION ACTIVITIES.

EROSION AND SEDIMENT CONTROL PLAN (ESCP) NOTES

- IN CASE OF EMERGENCY, CALL ANDREW DUTTON AT (415) 250-9882.
- TOTAL DISTURBED AREA: 16.9 ACRES. WQDF: 4.19C405820 RISK LEVEL: Q2
- A STANDBY CREW FOR EMERGENCY WORK SHALL BE AVAILABLE AT ALL TIMES DURING THE RAINY SEASON (NOVEMBER 1 TO APRIL 15). NECESSARY MATERIALS SHALL BE AVAILABLE ON-SITE AND STOCKPILED AT CONVENIENT LOCATIONS TO FACILITATE RAPID CONSTRUCTION OF EMERGENCY DEVICES WHEN RAIN IS IMMINENT.
- EROSION CONTROL DEVICES SHOWN ON THIS PLAN MAY BE REMOVED WHEN APPROVED BY THE BUILDING OFFICIAL IF THE GRADING OPERATION HAS PROCEEDED TO THE POINT WHERE THEY ARE NO LONGER REQUIRED.
- GRADED AREAS ADJACENT TO SLOPES LOCATED AT THE SITE PERIMETER MUST DRAIN AWAY FROM THE TOP OF SLOPE AT THE CONCLUSION OF EACH WORKING DAY. ALL LOOSE SOILS AND DEBRIS THAT MAY CREATE A POTENTIAL HAZARD TO OFF-SITE PROPERTY SHALL BE STABILIZED OR REMOVED FROM THE SITE ON A DAILY BASIS.
- ALL SILT AND DEBRIS SHALL BE REMOVED FROM ALL DEVICES WITHIN 24 HOURS AFTER EACH RAINSTORM AND BE DISPOSED OF PROPERLY.
- A GUARD SHALL BE POSTED ON THE SITE WHENEVER THE DEPTH OF WATER IN ANY DEVICE EXCEEDS TWO FEET. THE DEVICE SHALL BE DRAINED OR PUMPED DRY WITHIN 24 HOURS AFTER EACH RAINSTORM. PUMPING AND DRAINING OF ALL BASINS AND DRAINAGE DEVICES MUST COMPLY WITH THE APPROPRIATE BMP FOR DEWATERING OPERATIONS.
- THE PLACEMENT OF ADDITIONAL DEVICES TO REDUCE EROSION DAMAGE AND CONTAIN POLLUTANTS WITHIN THE SITE IS LEFT TO THE DISCRETION OF THE FIELD ENGINEER. ADDITIONAL DEVICES AS NEEDED SHALL BE INSTALLED TO RETAIN SEDIMENTS AND OTHER POLLUTANTS ON-SITE.
- DESILTING BASINS MAY NOT BE REMOVED OR MADE INOPERABLE BETWEEN NOVEMBER 1 AND APRIL 15 OF THE FOLLOWING YEAR WITHOUT THE APPROVAL OF THE BUILDING OFFICIAL.
- STORM WATER POLLUTION AND EROSION CONTROL DEVICES ARE TO BE MODIFIED, AS NEEDED, AS THE PROJECT PROGRESSES. THE DESIGN AND PLACEMENT OF THESE DEVICES IS THE RESPONSIBILITY OF THE FIELD ENGINEER. PLANS REPRESENTING CHANGES MUST BE SUBMITTED FOR APPROVAL IF REQUESTED BY THE BUILDING OFFICIAL.
- EVERY EFFORT SHOULD BE MADE TO ELIMINATE THE DISCHARGE OF NON-STORM WATER FROM THE PROJECT SITES AT ALL TIMES.
- ERODED SEDIMENTS AND OTHER POLLUTANTS MUST BE RETAINED ON-SITE AND MAY NOT BE TRANSPORTED FROM THE SITE VIA SHEET FLOW, SWALES, AREA DRAINS, NATURAL DRAINAGE COURSES, OR WIND.
- STOCKPILES OF EARTH AND OTHER CONSTRUCTION-RELATED MATERIALS MUST BE PROTECTED FROM BEING TRANSPORTED FROM THE SITE BY THE FORCES OF WIND OR WATER.
- FUELS, OILS, SOLVENTS, AND OTHER TOXIC MATERIALS MUST BE STORED IN ACCORDANCE WITH THEIR LISTING AND ARE NOT TO CONTAMINATE THE SOILS AND SURFACE WATERS. ALL APPROVED STORAGE CONTAINERS ARE TO BE PROTECTED FROM THE WEATHER. SPILLS MUST BE CLEANED UP IMMEDIATELY AND DISPOSED OF IN A PROPER MANNER. SPILLS MAY NOT BE WASHED INTO THE DRAINAGE SYSTEM.
- EXCESS OR WASTE CONCRETE MAY NOT BE WASHED INTO THE PUBLIC WAY OR ANY OTHER DRAINAGE SYSTEM. PROVISIONS SHALL BE MADE TO RETAIN CONCRETE WASTES ON-SITE UNTIL THEY CAN BE DISPOSED OF AS SOLID WASTE.
- DEVELOPERS/CONTRACTORS ARE RESPONSIBLE TO INSPECT ALL EROSION CONTROL DEVICES AND BMPs ARE INSTALLED AND FUNCTIONING PROPERLY IF THERE IS A 50% OR GREATER PROBABILITY OF PREDICTED PRECIPITATION, AND AFTER ACTUAL PRECIPITATION. A CONSTRUCTION SITE INSPECTION CHECKLIST AND INSPECTION LOGS SHALL BE MAINTAINED AT THE PROJECT SITE AT ALL TIMES AND AVAILABLE FOR REVIEW BY THE BUILDING OFFICIAL (COPIES OF THE SELF-INSPECTION CHECK LIST AND INSPECTION LOGS ARE AVAILABLE UPON REQUEST).
- TRASH AND CONSTRUCTION-RELATED SOLID WASTES MUST BE DEPOSITED INTO A COVERED RECEPTACLE TO PREVENT CONTAMINATION OF RAINWATER AND DISPERSAL BY WIND.
- SEDIMENTS AND OTHER MATERIALS MAY NOT BE TRACKED FROM THE SITE BY VEHICLE TRAFFIC. THE CONSTRUCTION ENTRANCE ROADWAYS MUST BE STABILIZED SO AS TO INHIBIT SEDIMENTS FROM BEING DEPOSITED INTO THE PUBLIC WAY. ACCIDENTAL DEPOSITIONS MUST BE SWEEPED UP IMMEDIATELY AND MAY NOT BE WASHED DOWN BY RAIN OR OTHER MEANS.
- ANY SLOPES WITH DISTURBED SOILS OR DENUDED OF VEGETATION MUST BE STABILIZED SO AS TO INHIBIT EROSION BY WIND AND WATER.
- AS THE ENGINEER/QSD OF RECORD, I HAVE SELECTED APPROPRIATE BMPs TO EFFECTIVELY MINIMIZE THE NEGATIVE IMPACTS OF THIS PROJECT'S CONSTRUCTION ACTIVITIES ON STORM WATER QUALITY. THE PROJECT OWNER AND CONTRACTOR ARE AWARE THAT THE SELECTED BMPs MUST BE INSTALLED, MONITORED, AND MAINTAINED TO ENSURE THEIR EFFECTIVENESS.

CIVIL ENGINEER/QSD SIGNATURE _____ DATE _____

21. AS THE PROJECT OWNER OR AUTHORIZED AGENT OF THE OWNER, I CERTIFY THAT THIS DOCUMENT AND ALL ATTACHMENTS WERE PREPARED UNDER MY DIRECTION OR SUPERVISION IN ACCORDANCE WITH THE SYSTEM DESIGNED TO ENSURE THAT A QUALIFIED PERSONNEL PROPERLY GATHER AND EVALUATE THE INFORMATION SUBMITTED, BASED ON MY INQUIRY OF THE PERSON OR PERSONS WHO MANAGE THE SYSTEM OR THOSE PERSONS DIRECTLY RESPONSIBLE FOR GATHERING THE INFORMATION, TO THE BEST OF MY KNOWLEDGE AND BELIEF, THE INFORMATION SUBMITTED IS TRUE, ACCURATE, AND COMPLETE. I AM AWARE THAT SUBMITTING FALSE AND/OR INACCURATE INFORMATION, FAILING TO UPDATE THE ESCP TO REFLECT CURRENT CONDITIONS, OR FAILING TO PROTECT AND/OR ADEQUATELY IMPLEMENT THE ESCP MAY RESULT IN REVOCATION OF GRADING AND/OR OTHER PERMITS OR OTHER SANCTIONS PROVIDED BY LAW.

OWNER OR AUTHORIZED REPRESENTATIVE (PERMITEE) _____ DATE _____



22. DEVELOPERS/CONTRACTORS ARE RESPONSIBLE TO INSPECT ALL EROSION CONTROL DEVICES AND BMPs ARE INSTALLED AND FUNCTIONING PROPERLY AS REQUIRED BY THE STATE CONSTRUCTION GENERAL PERMIT. A CONSTRUCTION SITE INSPECTION CHECKLIST AND INSPECTION LOG SHALL BE MAINTAINED AT THE PROJECT SITE AT ALL TIMES AND AVAILABLE FOR REVIEW BY THE BUILDING OFFICIAL.

23. THE FOLLOWING BMPs FROM THE "2009 CONSTRUCTION BMP HANDBOOK/PORTAL" MUST BE IMPLEMENTED FOR ALL CONSTRUCTION ACTIVITIES AS APPLICABLE. AS AN ALTERNATIVE, DETAILS FROM "CALTRANS STORMWATER QUALITY HANDBOOKS, CONSTRUCTION SITE BEST MANAGEMENT PRACTICES (BMP) MANUAL" MAY BE USED. ADDITIONAL MEASURES MAY BE REQUIRED IF DEEMED APPROPRIATE BY THE BUILDING OFFICIAL.

<p>EROSION CONTROL</p> <p>EC1 - SCHEDULING EC2 - PRESERVATION OF EXISTING VEGETATION EC3 - HYDRAULIC MULCHING EC4 - HYDROSEEDING EC5 - SOIL BINDERS EC6 - STRAW MULCH EC7 - GEOTEXTILES AND MATS EC8 - WOOD MULCHING EC9 - EARTH DIKES AND DRAINAGE SWALES EC10 - VELOCITY DISSIPATION DEVICES EC11 - SLOPE DRAINS EC12 - STREAMBANK STABILIZATION EC13 - RESERVED EC14 - COMPOST BLANKETS EC16 - NON-VEGETATED STABILIZATION</p> <p>TEMPORARY SEDIMENT CONTROL</p> <p>SE1 - SILT FENCE SE2 - SEDIMENT BASIN SE3 - SEDIMENT TRAP SE4 - CHECK DAM SE5 - FIBER ROLLS SE6 - GRAVEL BAG BERM SE7 - STREET SWEEPING AND VACUUMING SE8 - SANDBAG BARRIER SE9 - STRAW BALE BARRIER SE10 - STORM DRAIN INLET PROTECTION SE11 - ACTIVE TREATMENT SYSTEMS SE12 - TEMPORARY SILT DIKE SE13 - COMPOST BLOCKS AND BERMS SE14 - BIOFILTER BAGS</p>	<p>WIND EROSION CONTROL</p> <p>WE1 - WIND EROSION CONTROL</p> <p>TEMPORARY TRACKING CONTROL</p> <p>TC1 - STABILIZED CONSTRUCTION ENTRANCE EXIT TC2 - STABILITY CONSTRUCTION ROADWAY TC3 - ENTRANCE/OUTLET TIRE WASH</p> <p>NON-STORMWATER MANAGEMENT</p> <p>NS1 - WATER CONSERVATION PRACTICES NS2 - DEWATERING OPERATIONS NS3 - PAVING AND GRINDING OPERATIONS NS4 - TEMPORARY STREAM CROSSING NS5 - CLEAR WATER DIVERSION NS6 - ILLICIT CONNECTION/DISCHARGE NS7 - POTABLE WATER/IRRIGATION NS8 - VEHICLE AND EQUIPMENT CLEANING NS9 - VEHICLE AND EQUIPMENT FUELING NS10 - VEHICLE AND EQUIPMENT MAINTENANCE NS12 - CONCRETE CURING NS13 - CONCRETE FINISHING NS14 - MATERIAL AND EQUIPMENT USE NS15 - DEMOLITION ADJACENT TO WATER NS16 - TEMPORARY BATCH PLANTS</p>	<p>WASTE MANAGEMENT AND MATERIAL POLLUTION CONTROL</p> <p>WM1 - MATERIAL DELIVERY AND STORAGE WM2 - MATERIAL USE WM3 - STOCKPILE MANAGEMENT WM4 - SPILL PREVENTION AND CONTROL WM5 - SOLID WASTE MANAGEMENT WM6 - HAZARDOUS WASTE MANAGEMENT WM7 - CONTAMINATION SOIL MANAGEMENT WM8 - CONCRETE WASTE MANAGEMENT WM9 - SANITARY/SEPTIC WASTE MANAGEMENT WM10 - LIQUID WASTE MANAGEMENT</p>
--	---	---

EROSION CONTROL CONSTRUCTION NOTES

- INSTALL 6-FOOT HIGH CHAIN LINK FENCE WITH WIND SCREENING.
- INSTALL SILT FENCE PER CASQA BMP SE-1 ALONG PROJECT SITE PERIMETER AS NOTED PER DETAIL 1 ON SHEET C5.01.
- INSTALL FIBER ROLLS PER CASQA BMP SE-5 ALONG MAJOR ELEVATION CONTOURS (OR AS NOTED PER PLAN) PER DETAIL 2 ON SHEET C5.01.
- INSTALL GRAVEL BAG BERM PER CASQA BMP SE-6 ALONG PROJECT SITE PERIMETER AS NOTED PER DETAIL 3 ON SHEET C5.01.
- CONSTRUCT EARTHEN SWALE PER CASQA BMP EC-9.
- INSTALL STABILIZED CONSTRUCTION ENTRANCE PER CASQA BMP TC-1 AND TC-3 AT PROJECT SITE ENTRANCE PER DETAIL 5 ON SHEET C5.01.
- INSTALL WATER TIGHT TRASH CONTAINERS PER CASQA BMP WM-5 AWAY FROM DRAINAGE FACILITIES AND WATERCOURSES. ARRANGEMENTS FOR WASTE COLLECTION SHALL BE MADE PRIOR TO TWO-THIRDS CAPACITY. TRASH CONTAINERS SHALL BE COVERED AT THE END OF EACH WORK DAY.
- INSTALL SEDIMENT TRAP PER CASQA BMP SE-3 AT LOW POINT(S) OF EXCAVATION AREA AND PROVIDE PROVISIONS FOR DEWATERING PER CASQA BMP NS-2. CONTRACTOR TO DETERMINE EXACT LOCATION/SIZE AND SHALL UPDATE AS NEEDED BY CONSTRUCTION.
- INSTALL CONCRETE WASHOUT AREA PER CASQA BMP WM-8. PERFORM WASHOUT OF CONCRETE TRUCKS IN DESIGNATED AREAS ONLY WHERE WASHOUT WILL NOT REACH STORMWATER. UPDATE SIZE AND LOCATION AS NEEDED BY CONSTRUCTION.
- CONTRACTOR TO DETERMINE EXACT LOCATION AND SHALL UPDATE AS NEEDED BY CONSTRUCTION.
- CONTRACTOR TO DETERMINE EXACT LOCATION AND SHALL UPDATE AS NEEDED BY CONSTRUCTION.
- CONTRACTOR TO DETERMINE EXACT LOCATION AND SHALL UPDATE AS NEEDED BY CONSTRUCTION.
- PLACE PORTABLE TOILETS AWAY FROM DRAINAGE FACILITIES, WATERCOURSES, AND CONSTRUCTION PERIMETER. SECONDARY CONTAINMENT PER CASQA BMP WM-9 SHALL BE PROVIDED IN CASE OF SPILLS.
- STREET SWEEPING PER CASQA BMP SE-7.
- SOIL PREPARATION/ROUGHENING PER CASQA BMP EC-15.
- PRESERVE EXISTING VEGETATION OUTSIDE THE WORK LIMIT LINE PER CASQA BMP EC-2.
- INSTALL CHECK DAMS EVERY 100 FEET PER DETAIL 6 ON SHEET C5.01.
- INSTALL STORM DRAIN INLET PROTECTION PER CASQA BMP'S SE-10, TYPE 3 GRAVEL BAG, AND DETAIL 7 ON SHEET C5.01.

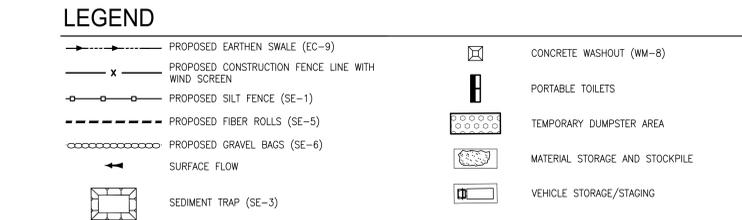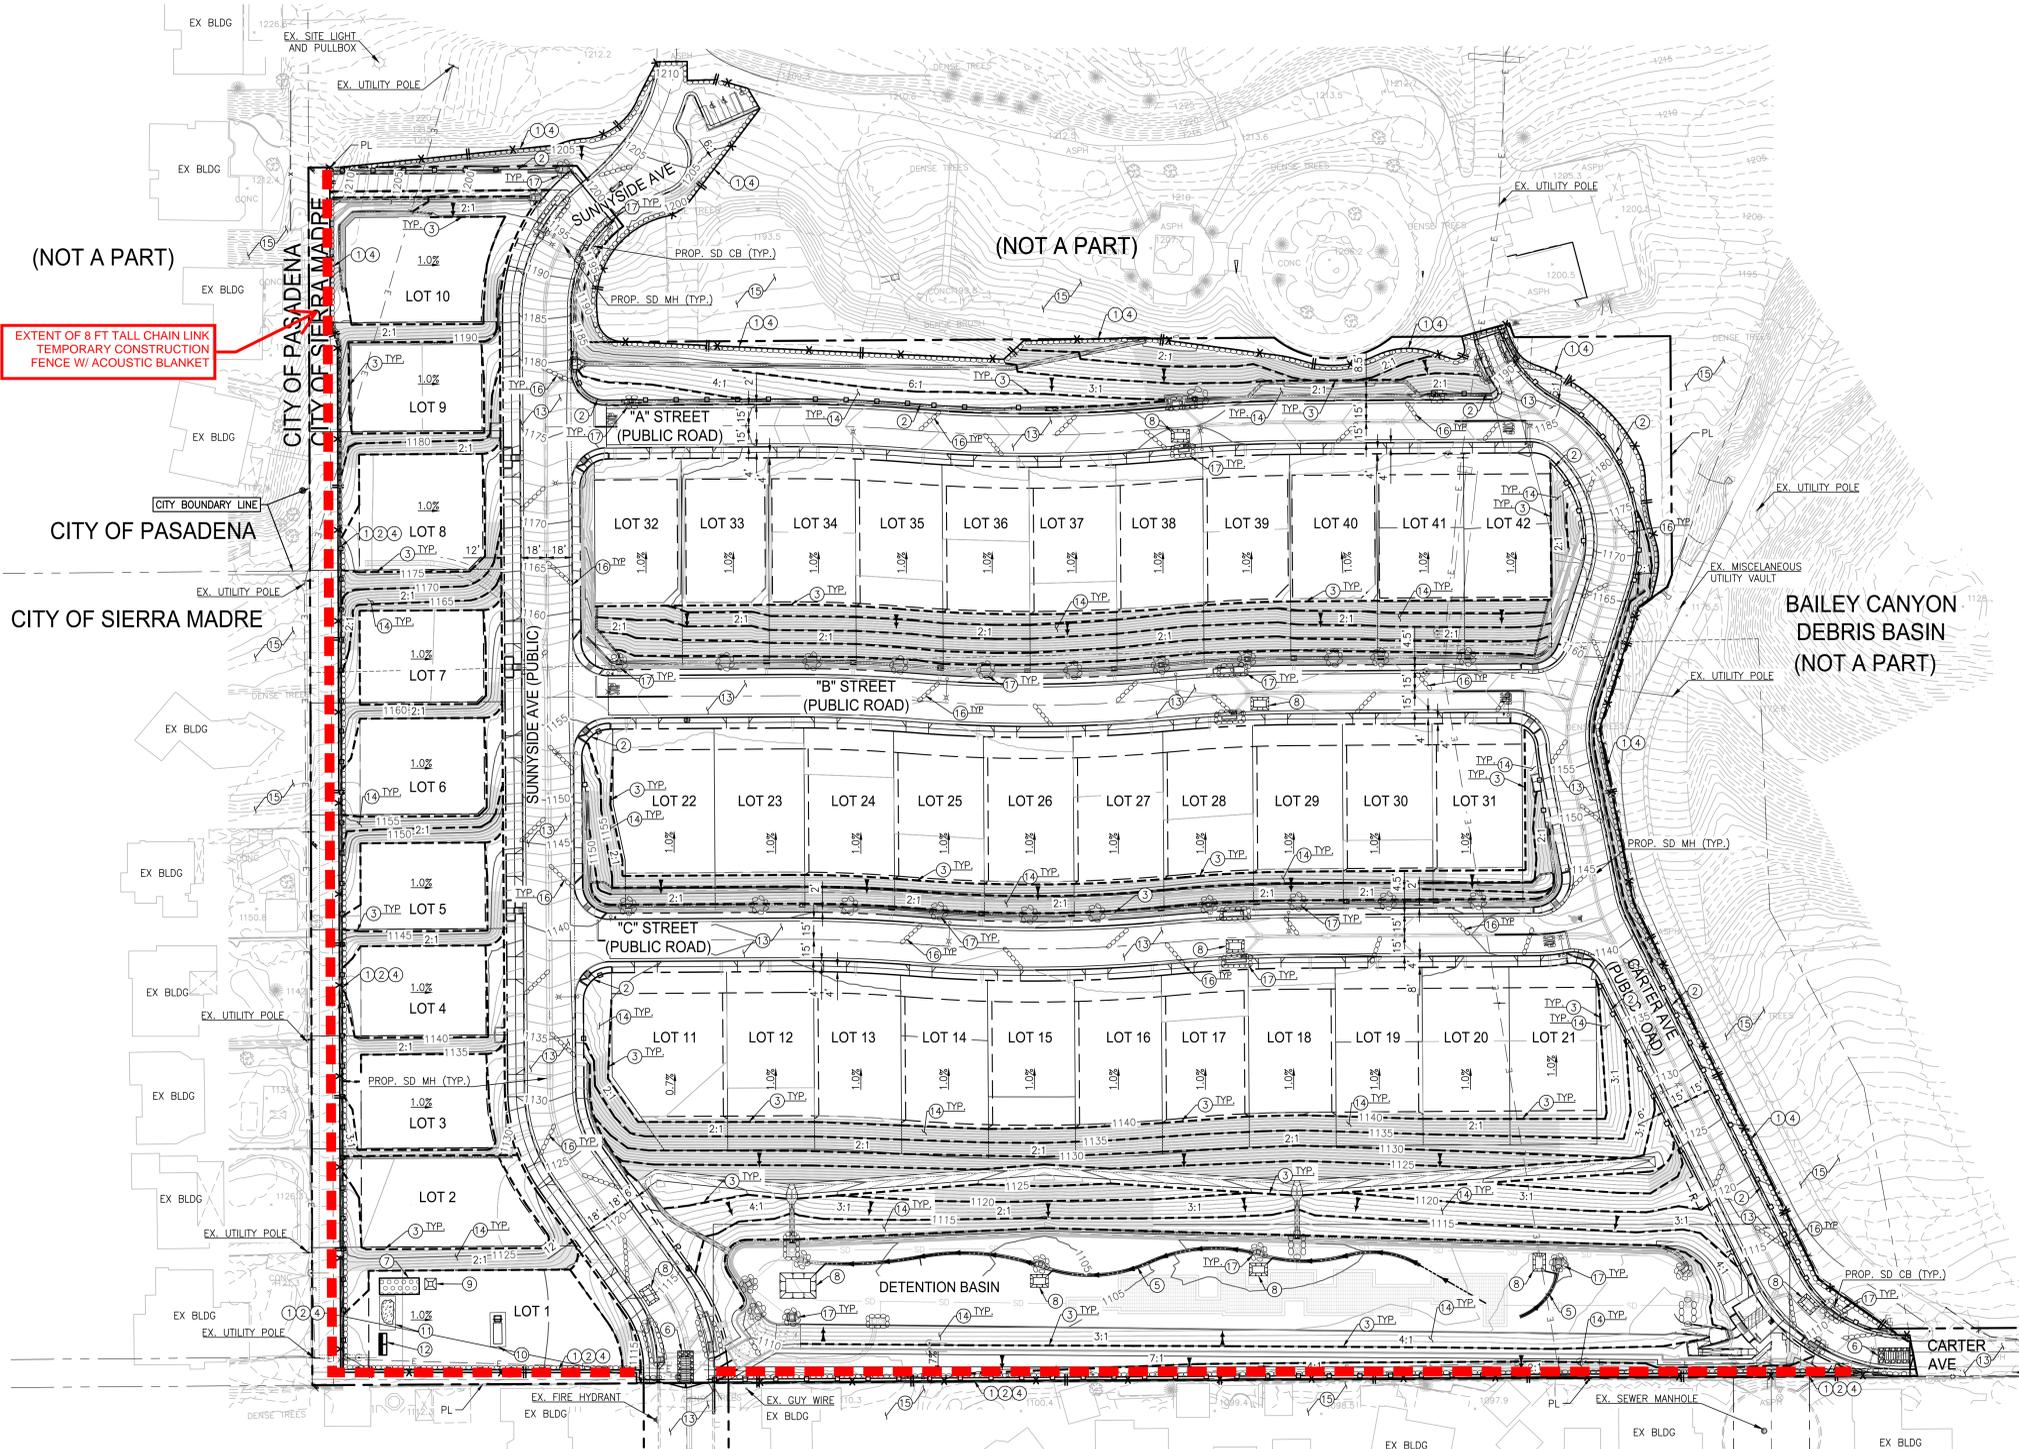


DEWATERING OPERATIONS NOTICE

DEWATERING WILL OCCUR TO REMOVE EXCESS WATER ANY UTILITY OR EXCAVATION SITES THAT HAS BEEN PONDED FOR GREATER THAN 72 HOURS. DISCHARGES MUST ONLY CONSIST OF CLEAN STORM WATER. ANY PONDED WATER (GREATER THAN 72 HOURS) MAY BE PUMPED FROM THE EXCAVATION AREA TO A BAFFLE TANK SYSTEM, OR WEIR TANK, TO REMOVE TRASH, SETTLEABLE SOLIDS, AS WELL AS SOME METALS, AND OIL AND GREASE, IF NECESSARY, PRIOR TO DISCHARGING OFFSITE. PERIODIC CLEANING IS REQUIRED BASED ON INSPECTIONS OR REDUCED FLOW, AND OIL & GREASE REMOVAL MUST BE DONE BY A LICENSED WASTE DISPOSAL COMPANY.

GENERAL NOTICE TO CONTRACTOR

- BMPs SHOULD BE ADDED, MOVED, OR REMOVED BASED ON SITE CONDITIONS. HAND-MARKED ALTERATIONS WITH INITIALS AND DATE ARE AN ACCEPTABLE FORM OF ALTERATION. THE CONTRACTOR MAY BE ASKED AT ANY TIME TO PRODUCE A WATER POLLUTION CONTROL DRAWING. FAILURE TO KEEP THIS DRAWING CURRENT COULD RESULT IN A NOTICE OF VIOLATION AND/OR FINE.
- STABILIZED CONSTRUCTION ENTRANCE, MATERIAL DELIVERY AND STORAGE AREA, WASTE COLLECTING AREA, AND EQUIPMENT AREA SHALL BE DESIGNATED BY SITE SUPERVISOR OR QSP AND INCLUDED ON THE WATER POLLUTION CONTROL DRAWING/EROSION CONTROL PLAN. AS SITE CONDITIONS CHANGE, THE WATER POLLUTION CONTROL DRAWING/EROSION CONTROL PLAN SHALL BE UPDATED TO REFLECT CURRENT CONDITIONS. REVISIONS SHALL BE INITIALED AND DATED.
- ANY INACTIVE, EXCAVATED, OR OTHER DISTURBED AREAS THAT WILL REMAIN INACTIVE FOR LONGER THAN 10 DAYS SHALL BE STABILIZED WITH HYDROSEED, HYDRAULIC MULCH, PLASTIC SHEETING (I.E. VISQUEEN ANCHORED WITH GRAVEL/SANDBAGS), OR EQUIVALENT EROSION CONTROL BMP. TEMPORARY SOIL STABILIZATION MEASURES SHALL BE MAINTAINED UNTIL PERMANENT STABILIZATION CAN BE ESTABLISHED.
- AN UPDATED EROSION AND SEDIMENT CONTROL PLAN (ESCP) MUST BE REVISED AND APPROVED PRIOR TO EACH RAINY SEASON THROUGHOUT THE SITE GRADING OPERATIONS.
- THE GRAVEL BAGS ARE SHOWN FOR REFERENCE ONLY. THE SITE SHALL HAVE PERIMETER SEDIMENT CONTROL AT ALL TIMES.
- DOWNSTREAM INLETS ARE TO BE PROTECTED



DIG ALERT
DIAL TOLL FREE 811
AT LEAST TWO DAYS BEFORE YOU DIG
UNDERGROUND SERVICE ALERT OF SOUTHERN CALIFORNIA


GEOTECHNICAL CONSULTANT:
THIS PLAN HAS BEEN REVIEWED AND CONFORMS TO RECOMMENDATIONS OF SOILS REPORT BY GEOSOLS, INC. DATED 2/5/2025, W.G. 6747A AND ALL ADDENDUMS.
6634 VALLEAN AVENUE
VAN NUYS, CA 91406
CONTACT: MAHAN PASADAPPOUR
TEL: (818) 785-2158

BENCHMARK:
BM NO.: H5213
ELEV.: 892.752' (LOS ANGELES COUNTY BENCHMARK)
DATING: NAVD 88, YEAR OF ADJUSTMENT 2013
DESCRIPTION: LA8R IN E CB 10FT S/O BCR @ SE COR SUNNYSIDE AVE & SIERRA MADRE BLVD.

LEGAL DESCRIPTION:
SEE CITY APPROVED LLA 21-01 FOR LOT MERGER
LEGAL DESCRIPTION ESTABLISHING PARCEL 1 AND PARCEL 2. PARCEL 2 DELINEATES PROJECT BOUNDARY, LEGAL DESCRIPTION ON TITLE SHEET.

PLANS PREPARED FOR:
TOLL WEST COAST LLC
9301 CORBIN AVENUE, SUITE 1200
NORTHridge, CA 91324
ATTN: ANDREW DUTTON
TEL: (415) 250-9882
EMAIL: ADUTTON@TOLLROTHERS.COM

PLANS PREPARED BY:
FUSCOE ENGINEERING
600 Wilshire Blvd, Suite 1470
Los Angeles, CA 90017
213.988.8802
fuscoe.com



DATE	BY	REVISIONS	DATE	APP'D

CITY OF SIERRA MADRE
THE MEADOWS RESIDENTIAL PROJECT
TRACT NO. 83966
EROSION CONTROL PLAN
C5.00